



Huslån Myresjöhus®


WINDOW AWNINGS

DA52


A sturdy awning especially suitable for buildings with larger windows, for example shops, offices, schools and hospitals. The drop arms are heavy duty with adjustable springs for optimal fabric tension. Front profile and tube are also heavy duty. Roof profile to protect fabric and tube included.




Outside operation with polyester tape.



Standard colours

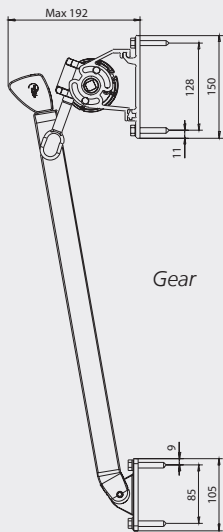

Gear

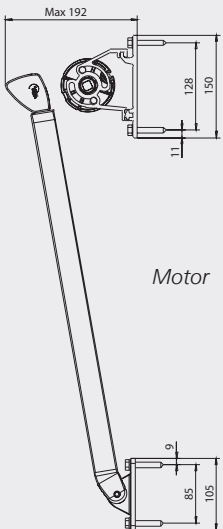

Motor

WINDOW AWNING DA52

DIMENSIONS (m)

Arm projection	0,6-1,4
Max width	7,0 per unit
Serie connection	25,0 with motor
Wind class	3 According to EN13561

Operation

Outside operation with crank as standard. Optionally, operation can be made with motor. The motor can be supplemented by automation, ie remote control or sun and wind automation.

Mounting

The awning can easily be mounted directly into the window-sills, on the wall or under the roof.

Drop arms

The arms are produced in extruded aluminium and the arm components in diecast zinc. For the best fabric tension, our drop arms have adjustable heavy duty springs.

Awning Fabric

Choose from a wide collection of both plain and striped fabrics.

Awning Hardware

The awning hardware with details can be ordered in 3 standard colours: White, Grey and structured Black. With longer delivery time, any RAL colour is available.