



# SCREEN AWNING


## VS24-44

VS24-44 is a compact screen awning with a functional design. It is suitable for windows on residential buildings, shops and office buildings. The screen runs vertically along the outside of the window and the bottom bar is controlled by cables along both sides of the screen. The screen fabric is available in a wide range of options, including flame retardant properties.

# SCREEN AWNING VS24-44




VS24 is tape operated as standard

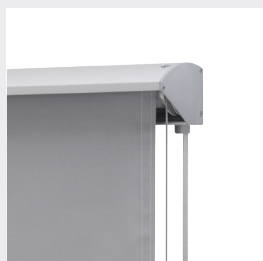


VS34 and 44: Screen awning with two different sizes of the cassette, tape operated.



Tape operation

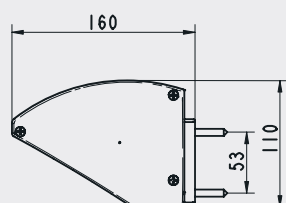

VS44

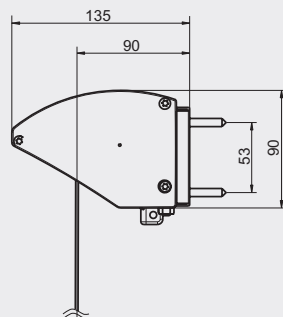

VS34

DIMENSIONS (m)	VS24	VS34	VS44
Max height	2,0	2,0	2,5
Max width	3,2 (4m motor)	3,2 (4m motor)	5,0
Series connection with motor	10	10	20
Cassette	Nej	Liten	Stor
Wind classification	3	3	3

Enligt EN13561

## Operation

VS 24-44 tape operation is standard. Optionally, operation can be made with motor or crank. The motor can be supplemented by automation, ie remote control or sun and wind automation.

## Mounting

The awning can easily be mounted directly into the window-sills, on the wall or under the roof.


## Awning hardware

Silver as standard.


## Awning fabric

We have a wide collection of high quality screen fabrics. The choice of colour, weaving technique and openness factor determines the fabrics possibilities to filter sunlight.

The screen collection has fabrics with flame retardant qualities and are Öko-tex and Enduris certified.

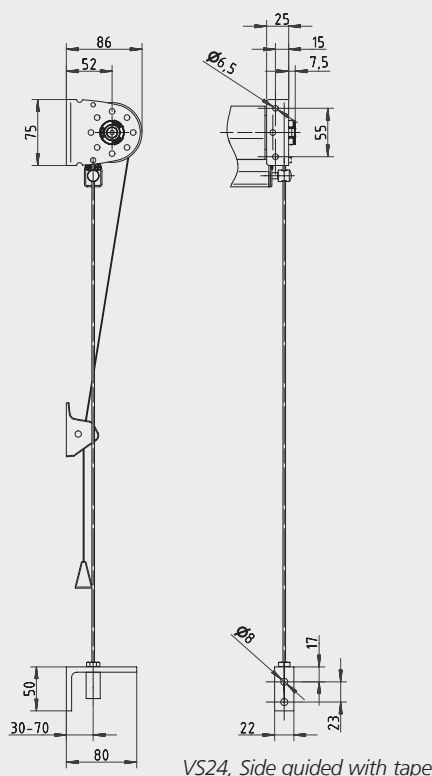

VS24, Side guided with tape

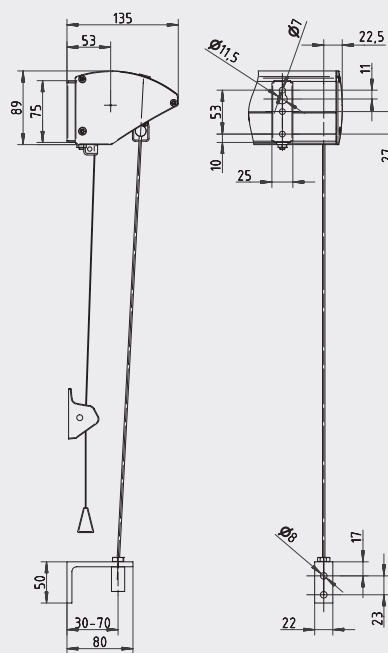

VS34, Side guided with tape