




BALCONY AWNING

BC26 & 56

Transform your balcony into a shaded and pleasant outdoor area by using a balcony awning, a compact drop arm awning developed especially for integrated balconies. The drop arms have adjustable spring tension for ensuring optimal fabric tension. Robust support legs allow flexible installation without having to make holes in the facade.

BALCONY AWNING BC26 & 56

DIMENSIONS (m)	BC 26	BC 56
Arm projection	0,8 m	0,6-2,2 m
Max width	4,0 m	4,0 m
Max height (legs)	2,5 m	-
Wind classification	3	3 According to EN 13561

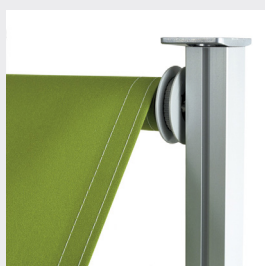

BC26 is easily mounted with these robust support legs, attached to the roof and the floor.



Drop arms with adjustable spring tension for best possible fabric tension.



BC56 has adjustable sliding arm brackets.



BC56 has heavier arms for longer projection.

Operation

Internal operation with polyester tape, crank box, crank or motor. A remote control unit or automatic controls, such as sun and wind sensors, are available as optional extras.

Mounting


The awning can be easily mounted using sturdy support legs that are attached between the floor and the ceiling, with no need to make holes in the facade.

Drop arms

Drop arms with adjustable spring tension for best possible fabric tension.

Awning fabric

Choose from a wide collection of both plain and striped fabrics.

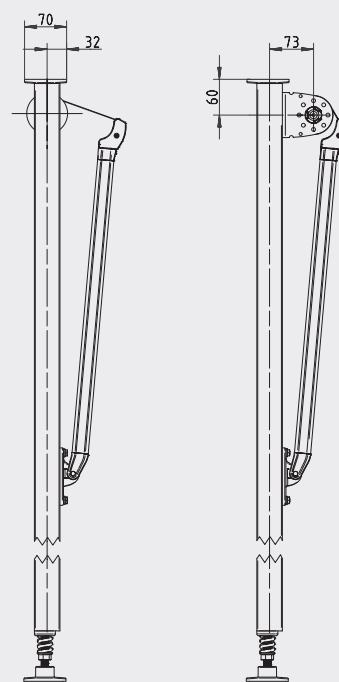

Installation option A:

Installation option B: