

ZIP95 Zip Screen



- Ensure that the awning is fixed to a sufficiently secure base. If needed - contact the façade- or window supplier for specific information.
- Check that the Zip-screen fits where supposed to be installed.
- Opening windows and doors may limit the possibility for installing Zip-screens.
- The motor and any control equipment must be installed by an authorised electrician.


1 Installing ZIP-guides and guide rails

Slide the black ZIP-guides into the guide profiles. The cut end of the ZIP-guide must be on the upper side.


Use the drilled holes in the guide rails to mark the hole positions on the mounting surface (wall A) and drill, if necessary, to correct diameter.

Screw the guide rails to the surface with suitable screws and check so that the profiles are vertical, parallel and on the same level.


Before continuing, check that the rails are installed with the same c-c as the legs of the cassette gables. Adjust if needed.



Left guide rail,
top view




Cut upper end on
plastic profile

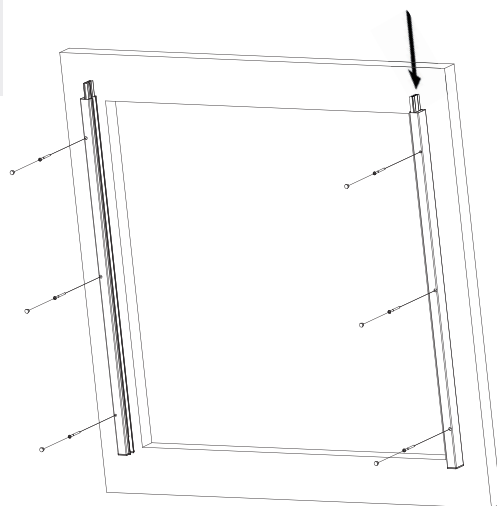



2. Assembling the cassette

Lift the cassette on top of the guide rails, make sure not to damage the motor cable.

Carefully assemble the legs of the cassette gables into the guide rails. Make sure the cassette gables rest on the guide rails and are levelled.

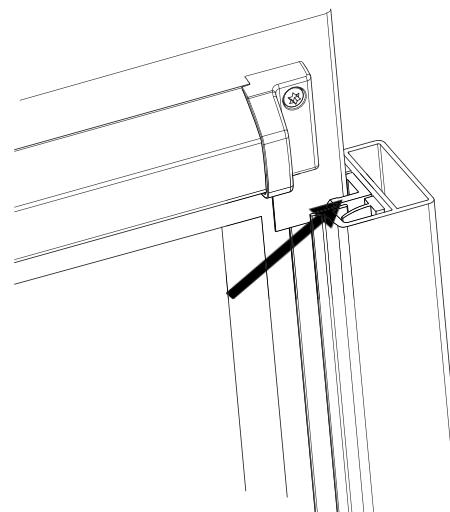

Make sure the zippers of the fabric run inside the slots of the ZIP-guides (both sides).

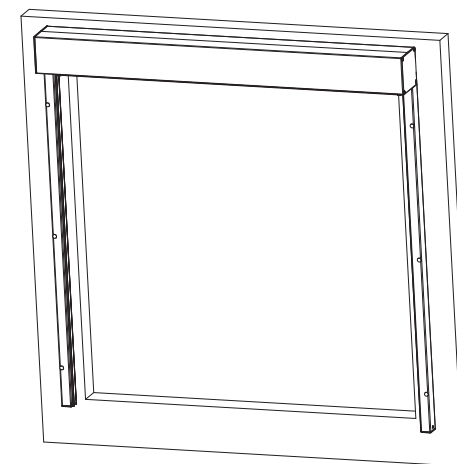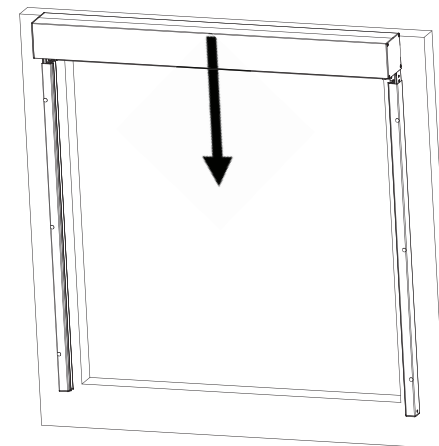

Maintenance:

The frame and the fabric are subjected to dirt and pollution and should be cleaned at least once a year in order to retain their high finish. This is particularly important in more exposed installations, e.g. environments near the sea. Use a soft cloth, tepid water and a mild cleaner. Do not use a high-pressure washer as it can damage the awning fabric and any electrical equipment, etc. For a detailed description of cleaning the fabric, please refer to its usage instructions.

Changing the awning fabric:

Before changing the awning fabric it is recommended to contact the company from which the awning was purchased to arrange an inspection of the frame. This company can provide more information about changing the fabric and also provides advice in case some other components may need to be replaced in order for the awning to maintain its finish and function.

Warning!

Always allow a professional to perform work that requires the cassette to be opened. The cassette needs to be opened when replacing the motor and/or fabric. When the cassette is opened, other parts can be damaged or out of position, and moving parts become accessible.

Any work with the motor requires proper authorization. This should therefore always be carried out by a professional.